

**Little
Giant**
Ladder Systems

LITTLEGIANTLADDERS.COM

'20

2020 CABLE/TELECOM CATALOG



PREVENTING INJURIES, SAVING LIVES™

MANY HAVE ASKED US WHY
WE INVEST SO MUCH INTO
RESEARCH & DEVELOPMENT.

THE SIMPLE ANSWER?

We are in business to prevent injuries and save lives.

Every day at least 2,000 people are injured while using a ladder. Over 100 of them suffer a long-term injury or even permanent disability. Every day one person dies, never returning home to their family.

This fundamental purpose drives Little Giant Ladder Systems® to be the safety and innovation leader in climbing systems and professional access equipment. We have partnered with safety professionals all over the world to develop real solutions to real safety problems.

DESIGNED FOR HUMAN BEHAVIOR

Little Giant is dedicated to leading the industry by constantly striving to help prevent ladder injuries. We design products to stack the cards in your favor, keeping you as safe as possible.

**EVERY RUNG, EVERY RIVET, EVERY WELD MATTERS.
EVERY PERSON MATTERS.**



HYPERLITE®



Demo Video

375 LBS RATED | TYPE IAA | 300 LBS RATED | TYPE IA | OSHA + ANSI COMPLIANT*

- 1. DOUBLE-PULLEY SYSTEM
- 2. BUBBLE LEVELS
- 3. SURE-SET™ FEET
- 4. CLAW® FASTENING SYSTEM
- 5. LIGHTWEIGHT FIBERGLASS
- 6. HI-VIZ GREEN
- 7. FLAT RUNGS
- 8. NON-MARKING WALL PAD FEET



CLAW® FASTENING SYSTEM & WALL PADS

Optional add-on: Clamp the ladder to strand or anchor points. Non-marking wall pads (IAA versions)



GROUND CUE®

Audible "click" on bottom rung alerts you when you have reached the bottom rung of the ladder. (IAA models only)



LEG LEVELER OPTIONS



SURE-SET™ FEET

Securely stays in place, swivels for use in the spike foot position.

(IAA models only)

INTEGRATED RACHETS

Easily adapts to unlevel ground.

AUTO-LEVELERS™

Automatically adapts to unlevel ground.

PART NUMBER	DESCRIPTION	HIGHEST STANDING LEVEL	MAX REACH*	TRIANGLE RUNG WIDTH	STORAGE HEIGHT	STORAGE WIDTH	WEIGHT
18316V	16' Type IA Claw, Cable Hook, V-Bar	9' 4"	15' 10"	1"	8' 7"	1' 6"	35 lbs
17516V	16' Type IAA Claw, Cable Hooks, V-bar, Ground Cue	9' 5"	15' 11"	1"	8' 8"	1' 6"	33 lbs
17516-264V	16' Type IAA Claw, Cable Hooks, V-bar, Ratchet Levelers	9' 8"	16' 2"	1"	8' 10"	1' 6"	39 lbs
18320V	20' Type IA Claw, Cable Hook, V-Bar	13' 2"	19' 8"	1"	10' 7"	1' 5"	44 lbs
17520V	20' Type IAA Claw, Cable Hooks, V-bar, Ground Cue	13' 3"	19' 9"	1"	10' 7"	1' 6"	42 lbs
17520-264V	20' Type IAA Claw, Cable Hooks, V-bar, Ratchet Levelers	13' 6"	20'	1"	10' 10"	1' 5"	48 lbs
18324V	24' Type IA Claw, Cable Hook, V-Bar	17' 1"	23' 7"	1"	12' 7"	1' 6"	50 lbs
17524V	24' Type IAA Claw, Cable Hooks, V-bar, Ground Cue	17' 3"	23' 9"	1"	12' 9"	1' 5"	49 lbs
17524-264V	24' Type IAA Claw, Cable Hooks, V-bar, Ratchet Levelers	17' 3"	23' 9"	1"	12' 10"	1' 5"	55 lbs
18328V	28' Type IA Claw, Cable Hook, V-Bar	20' 10"	27' 4"	1"	14' 6"	1' 6"	52 lbs
17528V	28' Type IAA Claw, Cable Hooks, V-bar, Ground Cue	20' 11"	27' 5"	1"	14' 7"	1' 6"	57 lbs
17528-264V	28' Type IAA Claw, Cable Hooks, V-bar, Ratchet Levelers	21' 1"	27' 7"	1"	14' 9"	1' 5"	62 lbs
17528-184V	28' Type IAA Claw, Cable Hooks, V-bar, Auto-Levelers	21' 2"	27' 7"	1"	14' 11"	1' 9"	61 lbs
17532V	32' Type IAA Claw, Cable Hooks, V-bar, Ground Cue	24' 8"	31' 2"	1"	16' 6"	1' 6"	62 lbs
17532-264V	32' Type IAA Claw, Cable Hooks, V-bar, Ratchet Levelers	24' 11"	31' 5"	1"	16' 9"	1' 5"	71 lbs
17532-184V	32' Type IAA Claw, Cable Hooks, V-bar, Auto-Levelers	25"	31' 6"	1"	16' 11"	1' 9"	72 lbs
17336V	36' Type IA Claw, Cable Hook, V-Bar	27' 7"	34' 1"	1"	18' 6"	1' 6"	73 lbs
17340V	40' Type IA Claw, Cable Hook, V-Bar	30' 5"	36' 11"	1"	20' 5"	1' 6"	80 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH
 COMPLIES WITH ALL OSHA, ANSI A14 STRENGTH AND TESTING STANDARDS. RUNG/STEP SPACING COMPLIES TO OSHA AND INT'L STANDARDS. OSHA 1910.23, OSHA 1926.10.53, CSA Z11, EN131-1, AS/NZS 1892.2.6.2

SUMOSTANCE®



Demo Video

375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT*

- 1. WIDE-STANCE LEVELERS
- 2. DOUBLE-PULLEY SYSTEM
- 3. BUBBLE LEVELS
- 4. SURE-SET™ FEET
- 5. LIGHTWEIGHT FIBERGLASS
- 6. HI-VIZ GREEN
- 7. GROUND CUE®
- 8. NON-MARKING WALL PAD FEET



WIDE-STANCE LEVELING & OUTRIGGING

When fully opened, the SumoStance outriggers provide 9" of leveling adjustment and expand 37", increasing side-tip stability up to 600%.



CLAW® FASTENING SYSTEM & WALL PADS

Optional add-on: Clamp the ladder to strand or anchor points. Non-marking wall pads (IAA versions)



LIGHTEST FIBERGLASS ON THE MARKET

More speed, less fatigue. We made the SumoStance out of lightweight fiberglass so you can move your ladder with ease.



SIDE, DOUBLE-PULLEY SYSTEM

Keep your feet free. We moved the pulley to the side of the ladder for safety and incorporated double-pulleys to make operation simple. Getting enough leverage to raise the ladder is fast and easy.

PART NUMBER	DESCRIPTION	HIGHEST STANDING LEVEL	MAX REACH*	TRIANGLE RUNG WIDTH	STORAGE HEIGHT	STORAGE WIDTH	WEIGHT
18420V	20' Type IA Claw, Cable Hooks, V-bar	13' 6"	20'	1"	10' 9"	1' 10"	39 lbs
17620V	20' Type IAA Claw, Cable Hooks, V-bar	13' 6"	20'	1"	10' 9"	1' 10"	49 lbs
18424V	24' Type IA Claw, Cable Hooks, V-bar	17' 3"	23' 9"	1"	12' 8"	1' 10"	50 lbs
17624V	24' Type IAA Claw, Cable Hooks, V-bar	17' 4"	23' 10"	1"	12' 9"	1' 10"	56 lbs
18428V	28' Type IA Claw, Cable Hooks, V-bar	21' 1"	27' 7"	1"	14' 8"	1' 10"	52 lbs
17628V	28' Type IAA Claw, Cable Hooks, V-bar	21' 2"	27' 8"	1"	14' 8"	1' 10"	62 lbs
18432V	32' Type IA Claw, Cable Hooks, V-bar	24' 11"	31' 5"	1"	16' 8"	1' 10"	66 lbs
17632V	32' Type IAA Claw, Cable Hooks, V-bar	25'	31' 6"	1"	16' 8"	1' 10"	76 lbs
17436V	36' Type IA Claw, Cable Hooks, V-bar	27' 10"	34' 4"	1"	18' 8"	1' 10"	81 lbs
17440V	40' Type IA Claw, Cable Hooks, V-bar	30' 8"	37' 2"	1"	20' 7"	1' 10"	89 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH
 ** ADD V TO THE END OF THE PART NUMBER TO REPLACE THE POLE STRAP WITH A V-BAR
 COMPLIES WITH ALL OSHA, ANSI A14 STRENGTH AND TESTING STANDARDS. RUNG/STEP SPACING COMPLIES TO OSHA AND INT'L STANDARDS. OSHA 1910.23, OSHA 1926.10.53, CSA Z11, EN131-1, AS/NZS 1892.2.6.2



LIMITED ARREST SYSTEM

FOR HYPERLITE AND SUMOSTANCE LADDERS




Demo Video



CONFIDENCE + SAFETY IN CLIMBING

The Limited Arrest is an integrated rope system that when harnessed in, keeps the user safely secured to lifeline rope.

We partnered with Petzl®, the #1 climbing company in the world, to create this state-of-the-art system to make sure you go home to your family safe.

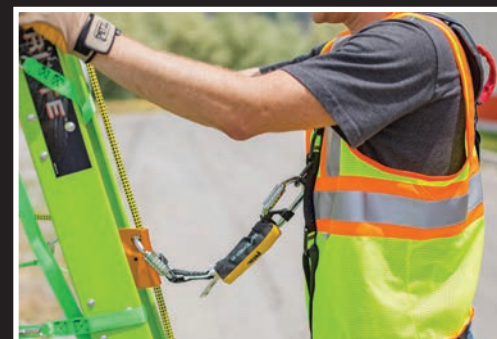

SECURE TO STRAND OR POLE



PRODUCT	PART NUMBER	DESCRIPTION	WEIGHT
HyperLite	17524-247	24' Type IAA Claw, Cable Hooks + V-Bar, Limited Arrest Safety Line*, Ground Cue, Sure-Set Feet	53 lbs
HyperLite	17524-267	24' Type IAA Claw, Cable Hooks + V-Bar, Limited Arrest Safety Line*, Integrated Leg Levelers	61 lbs
HyperLite	17528-247	28' Type IAA Claw, Cable Hooks + V-Bar, Limited Arrest Safety Line*, Ground Cue, Sure-Set Feet	63.5 lbs
HyperLite	17528-267	28' Type IAA Claw, Cable Hooks + V-Bar, Limited Arrest Safety Line*, Integrated Leg Levelers	70 lbs
HyperLite	17528-275	28' Type IAA Claw, Cable Hooks + V-Bar, Limited Arrest Safety Line*, Auto Leg Levelers	74 lbs
Sumostance	17624-247	24' Type IAA Claw, Cable Hooks + V-Bar, Limited Arrest Safety Line*, Ground Cue, Sure-Set Feet	59 lbs
Sumostance	17628-247	28' Type IAA Claw, Cable Hooks + V-Bar, Limited Arrest Safety Line*, Ground Cue, Sure-Set Feet	68.4 lbs
Petzl Accessory Kit	11750	ASAP Ascender and 'Sorber (Carabiners included on all ASAP kits)	2.16 lbs
Petzl Accessory Kit + Bags	11751	ASAP Ascender and 'Sorber including top and bottom bags with stabilizer straps for pole use on Hyperlite	5.5 lbs
Petzl Accessory Kit + Bag	11752	ASAP Ascender and 'Sorber including top bag with stabilizer straps for pole use on Sumostance	3.8 lbs

Harness not included
Complies with all OSHA, ANSI A14 strength and testing standards. Rung/step spacing complies to OSHA and Int'l Standards.*
*OSHA 1910.23, OSHA 1926.10.53, CSA Z11, EN131-1, AS/NZS 1892.2.6.2

TECHNICAL KING KOMBO™



Demo Video

375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT

- 1. ROTATING WALL PAD
- 2. COMFORT STEPS
- 3. GROUND CUE®
- 4. FLOATING RAIL BRACE
- 5. NON-CONDUCTIVE RAILS
- 6. FUNCTIONAL REAR SECTION
- 7. V-BAR
- 8. NON-MARKING WALL PAD FEET

The King Kombo Technical model has all the bells and whistles. The Technical Sure-Set Feet, Ground Cue and versatile V-Rung set it apart from other King Kombo models.



GET CLOSER TO YOUR WORK

ROTATING WALL PAD / V-BAR



INSIDE CORNER

OUTSIDE CORNER

FLAT WALL

POLE



LEANING



STEPLADDER



EXTENSION

PART NUMBER	MODEL	STEPLADDER HIGHEST STANDING LEVEL	STEPLADDER MAX REACH*	EXTENSION HIGHEST STANDING LEVEL	EXTENSION MAX REACH*	SPREAD	STORAGE WIDTH	STORAGE DEPTH	WEIGHT
13610-074	6'-10'	3' 9"	10' 3"	6' 7"	13' 1"	3' 8"	2' 1"	7"	24 lbs
13712-074	7'-12'	4' 8"	11' 2"	8' 9"	15' 3"	4' 7"	2' 4"	7"	28 lbs
13814-074	8'-14'	5' 8"	12' 2"	10' 8"	17' 2"	4' 11"	2' 4"	7"	32 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH

CONQUEST™



Demo Video

375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT

1. CARRYING HANDLE
2. NARROW ACCESS
3. NON-CONDUCTIVE FIBERGLASS
4. METAL PALM BUTTONS
5. METAL ROCK LOCK® FASTENERS
6. V-BAR*
7. WIDE-FLARED BASE



STAIRCASES

Adjust the sides of the ladder to work safely on stairs or other uneven surfaces.

EXTENSION

Compact body can be configured into a large extension ladder.



V-BAR

Optional add on: Non-marking, heavy duty V-bar grips poles and conforms to outside corners.



PART NUMBER	MODEL	STEPLADDER SIZE MIN-MAX	HIGHEST STANDING LEVEL MIN-MAX	EXTENSION SIZE MIN-MAX	EXT. HIGHEST STANDING LEVEL MIN-MAX	STORAGE HEIGHT	STORAGE DEPTH	WEIGHT
15144	17	4' - 7'	2' - 4' 10"	9' - 15'	5' 9" - 11' 7"	4' 7"	10"	40 lbs
15144-186*	17	4' - 7'	2' - 4' 10"	9' - 15'	5' 9" - 11' 7"	4' 7"	10"	42 lbs
15146	22	5' - 9'	2' 11" - 6' 8"	11' - 19'	7' 10" - 15' 6"	6' 7"	10"	47 lbs
15146-186*	22	5' - 9'	2' 11" - 6' 8"	11' - 19'	7' 10" - 15' 6"	6' 7"	10"	49 lbs

* INCLUDES V-BAR

SELECT STEP®



Demo Video

375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT

1. ACCESSORY PORTS ON TOP CAP
2. WIDE RUNGS
3. TIP & GLIDE™ WHEELS
4. COMFORT PLATFORM
5. ADJUSTABLE HEIGHT




ADJUSTABILITY

Easily adjusts to multiple configurations and sizes. Stepladder, 90°, Sloping Ground. With 5', 6', 7', 8' ladders in one, no job is out of reach.



ACCESSORY PORTS + AIRDECK

Ports allow use of Little Giant AirDeck® accessory in vertical and horizontal positions.

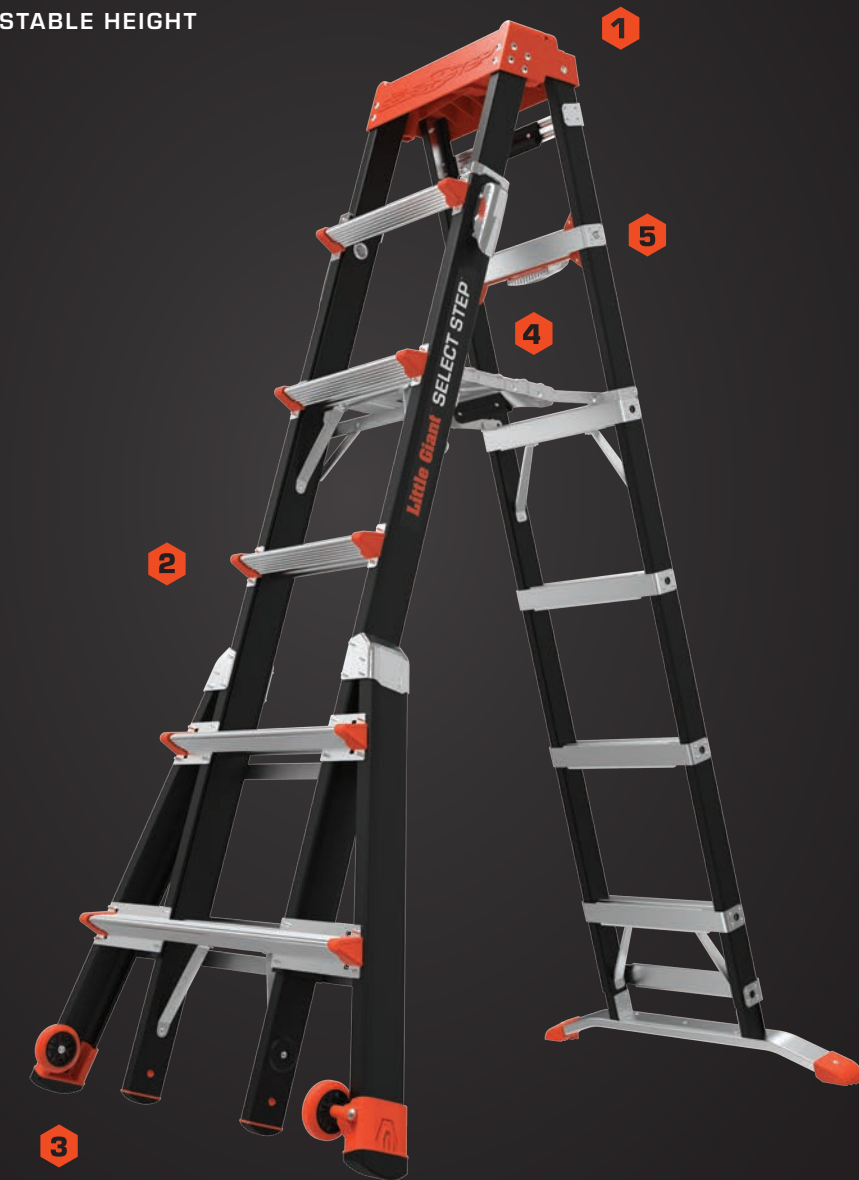

PART NUMBER	MODEL	HIGHEST STANDING LEVEL MIN-MAX	MAX REACH	SPREAD MIN-MAX	STORAGE HEIGHT	STORAGE DEPTH	WEIGHT
15130-001	5-8	2' 10" - 5' 8"	12' 4"	3' 5" - 5' 2.5"	5' 1.5"	8.5"	34 lbs
15130-920*	5-8	2' 10" - 5' 8"	12' 4"	3' 5" - 5' 2.5"	5' 1.5"	8.5"	38 lbs
15131-001	6-10	3' 10" - 7' 7"	14' 1"	4' - 6' 5"	6' 1"	9"	41 lbs
15131-920	6-10	3' 10" - 7' 7"	14' 1"	4' - 6' 5"	6' 1"	9"	45 lbs

* INCLUDES AIRDECK ACCESSORY

MIGHTYLITE™



Demo Video


375 LBS RATED | TYPE IAA | 300 LBS RATED | TYPE IA | OSHA + ANSI COMPLIANT

- 1. TOOL TRAY TOP CAP
- 2. COMFORT PLATFORM
- 3. GROUND CUE®
- 4. SLIM STORAGE PROFILE
- 5. FLOATING RAIL BRACE
- 6. NON-CONDUCTIVE FIBERGLASS RAILS



COMFORT PLATFORM

Stand on the comfort platform for a more balanced and safe working experience.

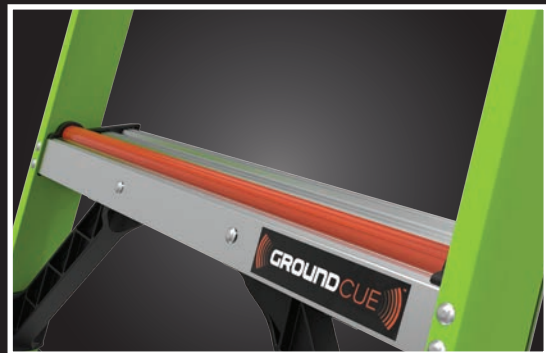

GROUND CUE®

Audible "click" on bottom step alerts you when you have reached the bottom step of the ladder.



PART NUMBER	MODEL	RATING	HIGHEST STANDING LEVEL	MAX REACH*	SPREAD	STEP WIDTH	STORAGE HEIGHT	STORAGE WIDTH	STORAGE DEPTH	WEIGHT
15364-001	4' (2 step)	1A	1' 10.5"	8' 4.5"	2' 3.5"	3.25"	4' 2"	1' 7"	4"	12 lbs
15384-001	4' (2 step)	1AA	1' 10.5"	8' 4.5"	2' 3.5"	3.25"	4' 2"	1' 7"	4"	13 lbs
15365-001	5' (3 step)	1A	2' 10"	9' 4"	2' 11"	3.25"	5' 2"	1' 8.5"	4"	14 lbs
15385-001	5' (3 step)	1AA	2' 10"	9' 4"	2' 11"	3.25"	5' 2"	1' 8.5"	4"	16 lbs
15366-001	6' (4 step)	1A	3' 9.5"	10' 3.5"	3' 7"	3.25"	6' 2"	1' 10"	4"	17 lbs
15386-001	6' (4 step)	1AA	3' 9.5"	10' 3.5"	3' 7"	3.25"	6' 2"	1' 10"	4"	19 lbs
15368-001	8' (6 step)	1A	5' 8"	12' 2"	4' 11"	3.25"	8' 2"	2'	4"	24 lbs
15388-001	8' (6 step)	1AA	5' 8"	12' 2"	4' 11"	3.25"	8' 2"	2'	4"	25 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH COMFORT PLATFORM 13" X 13"

SENTINEL™

375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT

- 1. ROTATING WALL PAD
- 2. EXTRA-WIDE COMFORT STEPS
- 3. GROUND CUE®
- 4. RAIL STORAGE LOCKS
- 5. NON-CONDUCTIVE FIBERGLASS RAILS
- 6. FLOATING RAIL BRACE



INSIDE CORNER



OUTSIDE CORNER



FLAT WALL



2X4 STUD



RAIL STORAGE LOCKS

Keep rails together while in leaning position, storage and transit.



COMFORT STEPS

Wide steps provide stability and comfort for long hours of getting the job done.

PART NUMBER	MODEL	STEPLADDER HIGHEST STANDING LEVEL	STEPLADDER MAX REACH*	SPREAD	STORAGE WIDTH	STORAGE DEPTH	WEIGHT
15910-002	10	7' 8"	14' 2"	5' 4"	2' 2"	7"	40 lbs
15912-002	12	9' 7"	16' 1"	6' 3"	2' 4"	7"	48 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH

10' & 12'
OSHA/ANSI
COMPLIANT
A-FRAME &
LEANING
LADDER



UNDERGROUND

UTILITY ACCESS™


375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT*

1. MULTIPLE CONFIGURATIONS
2. NARROW ACCESS
3. RAPID LOCK® FASTENERS



RAPID LOCKS®

Quickly adjust and fasten the different size extender sections to your ladder.

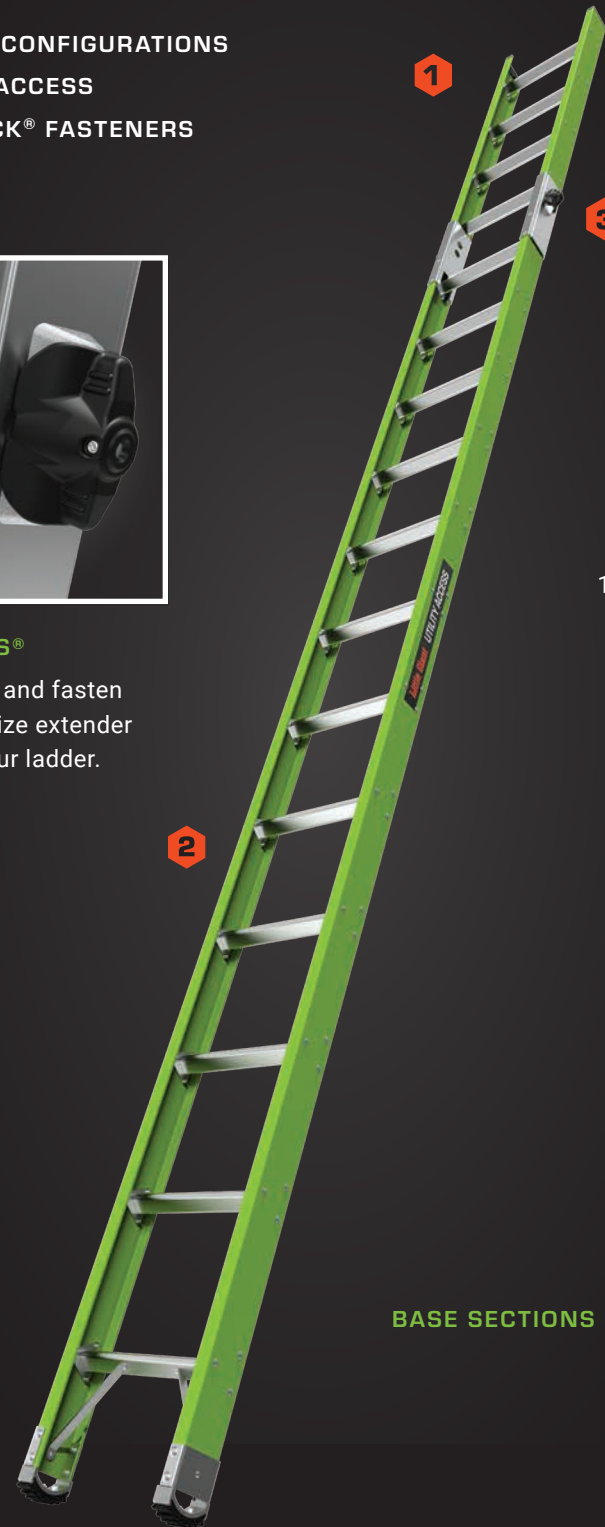

MIX AND MATCH

The UUA ladder allows you the ability to mix and match different sized bases and upper sections, so you can get the perfect size for the job at hand.

UPPER SECTIONS



BASE SECTIONS



VERSATILITY IN REACHING DEPTHS

THE PERFECT LADDER FOR NARROW ACCESS POINTS



PART NUMBER	DESCRIPTION	EXTENSION LADDER SIZE	TRIANGLE RUNG WIDTH	STORAGE HEIGHT	STORAGE WIDTH	WEIGHT
18004	UNDERGROUND UTILITY ACCESS, 4' BASE ASSEMBLY, TYPE 1AA, FG LADDER	4' - 12'	1.5"	4' 8"	1' 3"	16.5 lbs
18114	UNDERGROUND UTILITY ACCESS, 4' UPPER ASSEMBLY, FIBERGLASS ACCESSORY	Attach to Base	1.5"	4'	1' 3"	7 lbs
18008	UNDERGROUND UTILITY ACCESS, 8' BASE ASSEMBLY, TYPE 1AA, FG LADDER	8' - 16'	1.5"	8' 8"	1' 3"	20 lbs
18118	UNDERGROUND UTILITY ACCESS, 8' UPPER ASSEMBLY, FIBERGLASS ACCESSORY	Attach to Base	1.5"	7' 11"	1' 3"	13 lbs
18002	UNDERGROUND UTILITY ACCESS, 12' BASE ASSEMBLY, TYPE 1AA, FG LADDER	12' - 20'	1.5"	8' 5"	1' 3"	23.5 lbs

17012-001 INCLUDES THE 4' AND 8' SECTIONS

* Special Purpose Ladder. Complies with all applicable OSHA and ANSI A14 Standards, except base width and rung spacing.

ADJUSTABLE SAFETY CAGE®

375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT



Demo Video

- 1. FULLY ENCLOSED PLATFORM
- 2. WHEEL LIFT™ CASTERS
- 3. TIP & GLIDE™ WHEELS
- 4. DEPLOYABLE OUTRIGGERS
- 5. NON-CONDUCTIVE FIBERGLASS
- 6. WIDE-FLARED BASE



DEPLOYABLE OUTRIGGERS

Additional stability with deployable outriggers.



WHEEL LIFT™ CASTERS

Easily move the Cage while fully deployed.



PART NUMBER	MODEL	HIGHEST STANDING LEVEL MIN-MAX	MAX REACH*	SPREAD MIN-MAX	STORAGE HEIGHT	WEIGHT
18503-240**	3' - 5'	3' - 4' 11"	11' 5"	3' 9" - 5' 11"	7' 10"	102 lbs
18503-243**	3' - 5'	3' - 4' 11"	11' 5"	3' 9" - 5' 11"	7' 10"	107 lbs
18509-240	5' - 9'	4' 11" - 8' 8.5"	15' 2"	4' 11" - 8' 8.5"	9' 10"	129 lbs
18509-243	5' - 9'	4' 11" - 8' 8.5"	15' 2"	4' 11" - 8' 8.5"	9' 10"	129 lbs
18515-240	8' - 14'	7' 8.5" - 13' 5"	19' 11"	6' 8.5" - 10' 6"	12' 9"	151 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH
 ** AVAILABLE OPTIONS: -240 INCLUDES WHEEL LIFT AND NET, -243 INCLUDES WHEEL LIFT AND NET, ALL TERRAIN WHEELS*
 BASE WIDTH: 3' 9.5"
 ** OUTRIGGERS NOT AVAILABLE ON 3'-5' MODELS

SAFETY CAGE®

375 LBS RATED | TYPE IAA | OSHA + ANSI COMPLIANT



Demo Video

- 1. FULLY ENCLOSED PLATFORM
- 2. GROUND CUE®
- 3. NON-CONDUCTIVE FIBERGLASS
- 4. WEIGHT ACTIVATED WHEELS




ENCLOSURE

Self-closing, one-way gates designed with ultimate safety in mind.



PLATFORM

Safely and comfortably work up high in an enclosed platform.

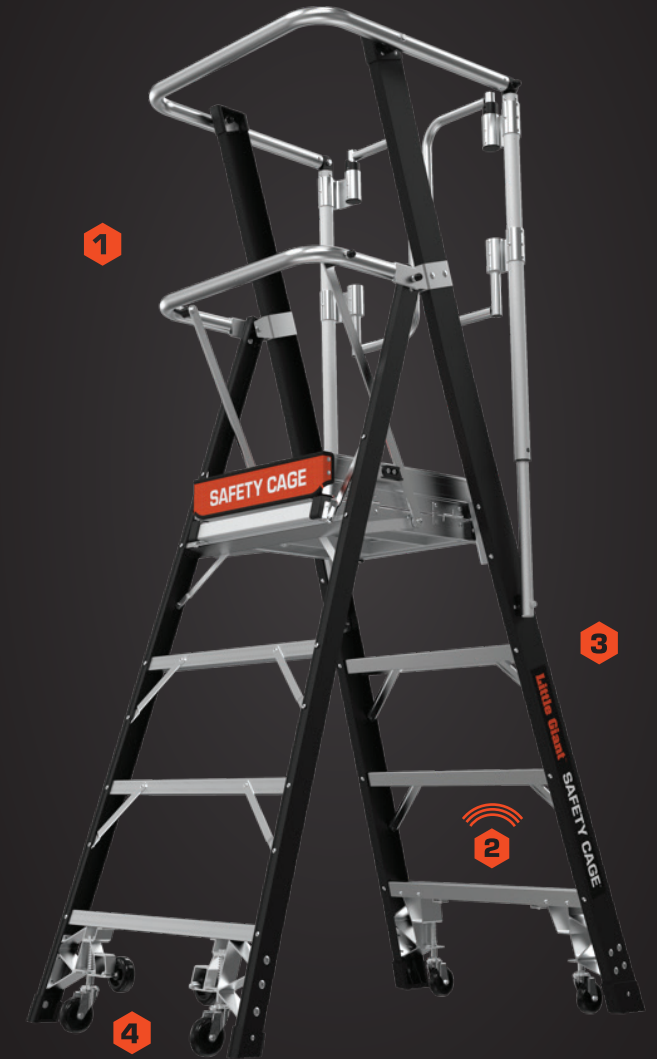

PART NUMBER	MODEL	COMPARABLE STEP LADDER SIZE	HIGHEST STANDING LEVEL	MAX REACH*	SPREAD	STEP WIDTH	STORAGE HEIGHT	STORAGE WIDTH AT BASE	WEIGHT
19602	2'	4'	1' 10"	8' 4"	2' 10.5"	3"	6' 6"	2'	46 lbs
19604	4'	6'	3' 9"	10' 3"	4' 1.5"	3"	8' 6"	2' 5"	54 lbs
19606	6'	8'	5' 8"	12' 2"	5' 4"	3"	10' 6"	2' 9"	67 lbs
19608	8'	10'	7' 6"	14'	6' 7"	3"	12' 6"	3'	77 lbs

* A 5' 6" PERSON WITH A 12" VERTICAL REACH
 STORAGE DEPTH: 6" PLATFORM SIZE: 18" X 22" GUARDRAIL HEIGHT: 42"

Little Giant[®]

Ladder Systems

1198 North Spring Creek Place
Springville, Utah 84663 USA

P: 866.872.5901
F: 801.489.9691

www.LittleGiantLadders.com
PAT. www.LittleGiantLadders.com/patents
©2020 Little Giant Ladder Systems 82535 v7 7.20